

▼ Airly Vision III

Indoor - P3.875


Ultra-thin & ultra-light

16/9 ratio


992 x 558mm

- > Fight ultra-thin
- > Ultra-light
- > Magnetic connection function
- > Independent control box
- > Black SMD high contrast

INDOOR P3.875

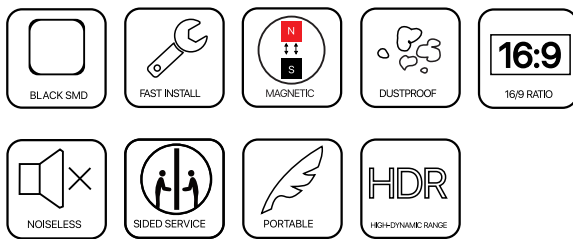

SIZE CHART


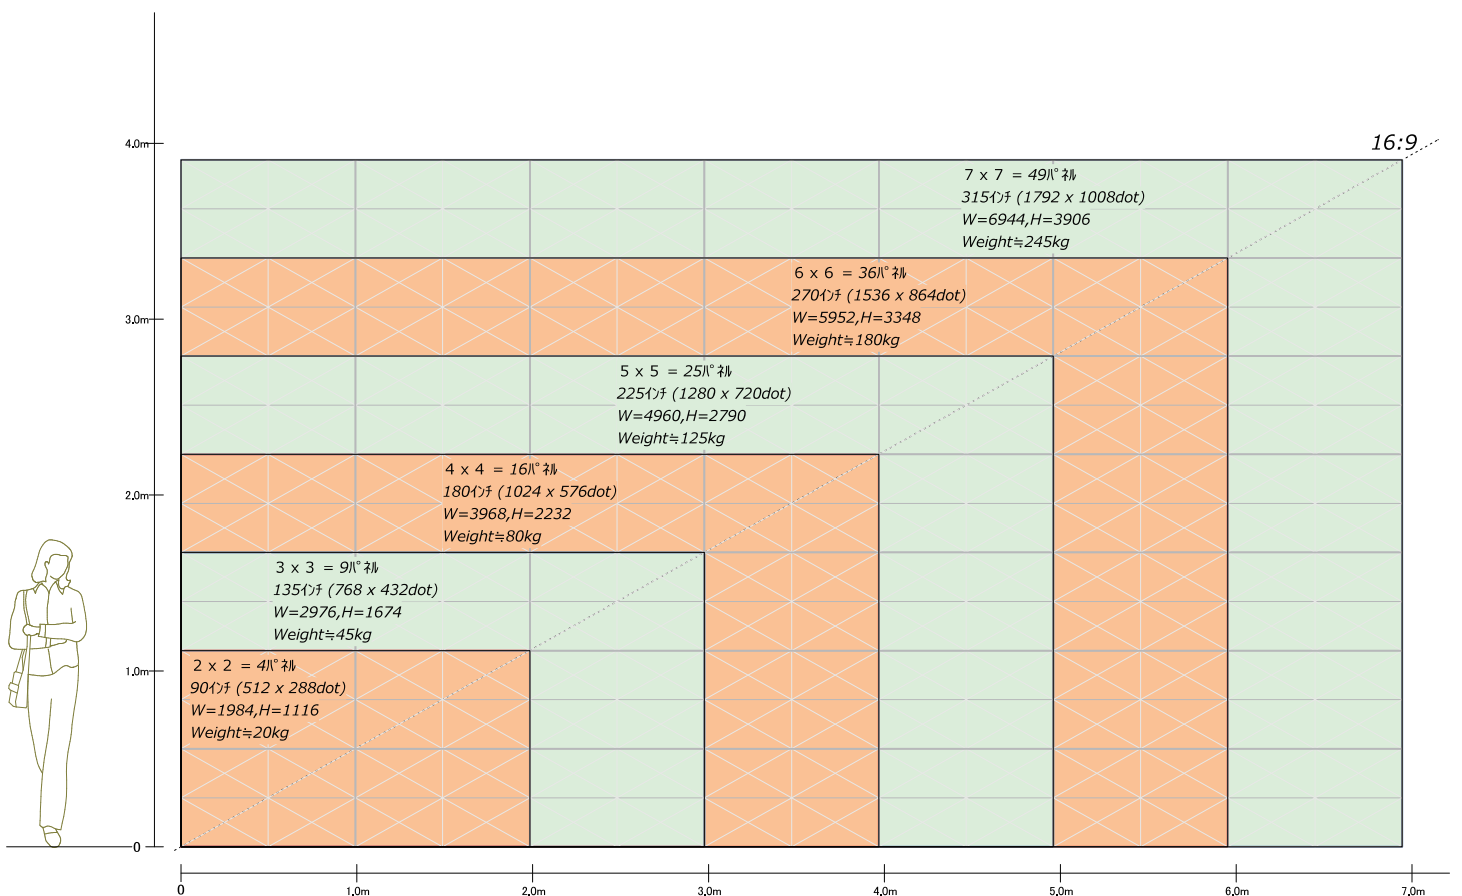


※仕様は開発中のため変更になる場合があります。

POLYMERS MATERIAL




16:9 Proportion classic

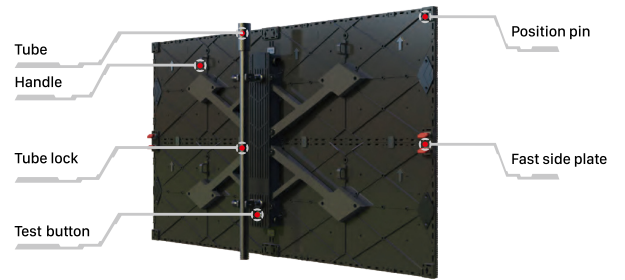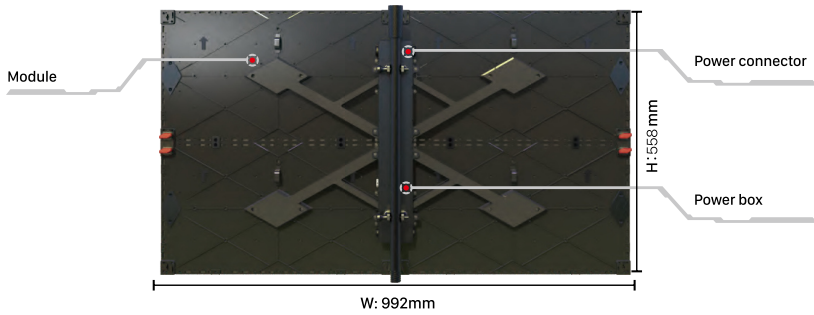

MEASUREMENT

MODULE	Width: 496mm	Height: 297mm	Thickness: 8.3~9.9mm	Weight: 0.5~1 kg
CABINET	Width: 992mm	Height: 558mm	Thickness: 110mm	Weight: 4~7.5kg

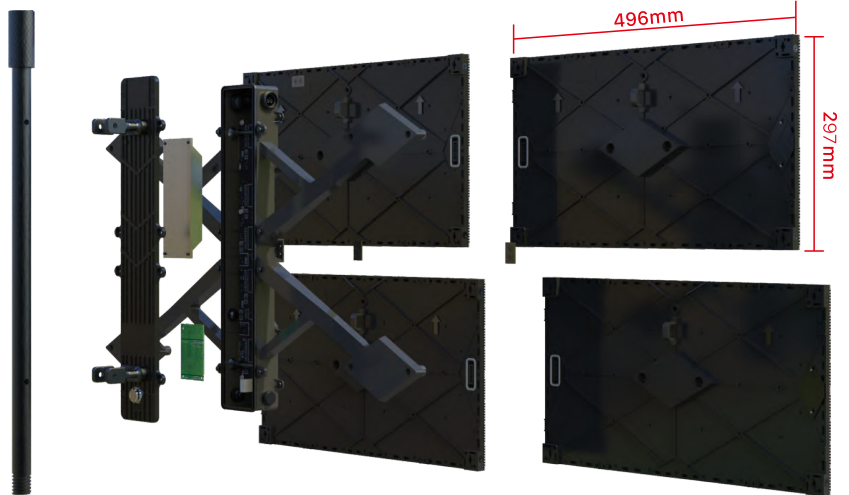

HANGING

Use as hanging bar with side locks and truss hook on top

Rear maintenance



HANGING





Use your display where you want

Airly Vision - INDOOR









PARAMETER

- > FPI : Fine Pitch Indoor
- > LTP : LED Treatment Protection
- > Big viewing angle
- > Magnetic (Option screw)
- > Ultra-light
- > HDR ready
- > No ghosting



True Black SMD

	INDOOR	
PITCH	P3.875	
SERIES NO.	LP387i	
TRUE BLACK SMD	1500-1800cd/m ²	
DISTANCE	> 3.875m	
LED KIND	SMD1515	
PIXEL DENSITY	66564 dots/m ²	
TECHNOLOGY	AOB, FPI, FPO, HDR, iMODULES, CCT (Optional technology)	
REFRESH RATE	1920 - 3840Hz	
VIEW ANGLE	160°(H) / 160° (V)	
CONTRAST	3000 : 1	
MAX.STACKING MAX.HANGING	20 Cabinets	
MODULE SIZE		496 x 279 mm
CABINET SIZE		992 x 558 mm 39" x 21.9"
CABINET RES	256 x 144px	
DRIVE MODE	1/9 scan or 1/18 scan	
ENVIRONMENT		IP20
MAX POWER		200W/m ²
VOLTAGE		AC 100-240V
WEIGHT		5~5.5 kg / Panel
POPULAR	Hot	
CERTIFICATION	CE, EMC, TUV-EMC, FCC, ETL, UL, PSE, CCC, ROHS ※取得予定	